



# QUALITY LIFTS™

## Q4P12E-X: 12,000 lb. Capacity Service Mounted 4-Post



**model#: Q4P12E**  
Surface mounted 4-Post

**model#: Q4P12X**  
Surface mounted 4-Post  
Extended Length Version



**model#: Q4P12E**  
Surface Mounted 4-Post Lift  
12,000 lb. lifting capacity  
(shown with optional 6K capacity rolling jacks)



**POWDER  
COAT  
FINISH**

### Features & Benefits:


- Rigidity and stability for rigorous servicing needs, achieved due to solid piece column construction.
- 14 level locking positions for a variety of service tasks.
- Oversized solid machined steel pulleys provides prolonged pulley and cable life.
- Adjustable runways accommodate a variety of tread widths, coupled with louvered approach ramps for positive vehicle traction.
- Optional bolt-on alignment kit converts general service application into an alignment rack.
- Hydraulic cylinder mounted underneath runway.
- Additional accessories available: Rolling jacks, oil drain pan

| Specifications                              | Q4P12E                           | Q4P12x                           |
|---|----------------------------------|----------------------------------|
| Lifting Capacity*                           | 12,000 lb.                       | 12,000 lb.                       |
| Max. Wheelbase <sup>1</sup>                 | 182 1/2"<br>(4636 mm)            | 210"<br>(5334 mm)                |
| Rise Height (a)                             | 78"<br>(1981 mm)                 | 78"<br>(1981 mm)                 |
| Overall Length (b)                          | 20' 4 1/2"<br>(6210 mm)          | 22' 8"<br>(6909 mm)              |
| Overall Width (c)                           | 10' 10 3/4"<br>(3321 mm)         | 10' 10 3/4"<br>(3321 mm)         |
| Inside of Columns (d)                       | 116"<br>(2946 mm)                | 116"<br>(2946 mm)                |
| Between Columns (e)                         | 196"<br>(4978 mm)                | 223 1/2"<br>(5677 mm)            |
| Height of Columns (f)                       | 90 1/2"<br>(2299 mm)             | 90 1/2"<br>(2299 mm)             |
| Width of Runways (g)                        | 20"<br>(508 mm)                  | 20"<br>(508 mm)                  |
| Height of Runways (h)                       | 7"<br>(178 mm)                   | 7"<br>(178 mm)                   |
| Width between Runways (j) (Minimum/Maximum) | 40" / 43"<br>(1016 mm / 1092mm)  | 40" / 43"<br>(1016 mm / 1092mm)  |
| Air Supply Required                         | 85-120 psi                       | 85-120 psi                       |
| Motor                                       | 2 HP                             | 2 HP                             |
| Voltage Single Phase <sup>2</sup>           | 230 Volt                         | 230 Volt                         |
| Speed of Rise                               | 70 sec.                          | 70 sec.                          |
| Min. Recommended Bay Size                   | 12' x 26'<br>(3658 mm x 7925 mm) | 12' x 26'<br>(3658 mm x 7925 mm) |

| Alignment Wheelbase |                                     |                                 |
|---------------------|-------------------------------------|---------------------------------|
| Maximum 2 Wheel     | 180 3/4" (4591 mm)                  | 208 1/4" (5290 mm)              |
| Max. Wheelbase      | 31" / 182 1/2"<br>(787mm / 4622 mm) | 31" / 210"<br>(787mm / 5334 mm) |




## Q4P12: 12K lb. Service Mounted 4-Post

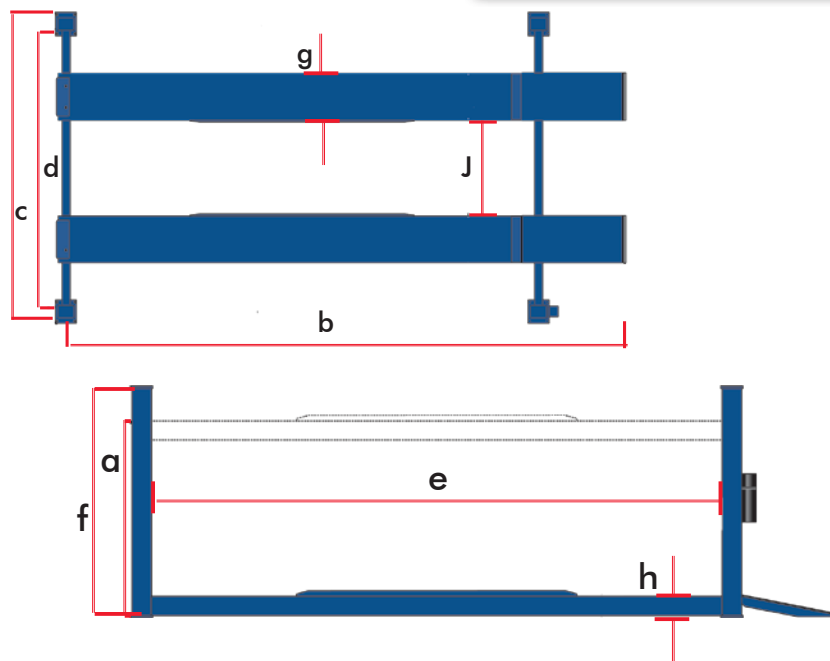

## Optional Accessories

### Optional Bolt-on Alignment Kit

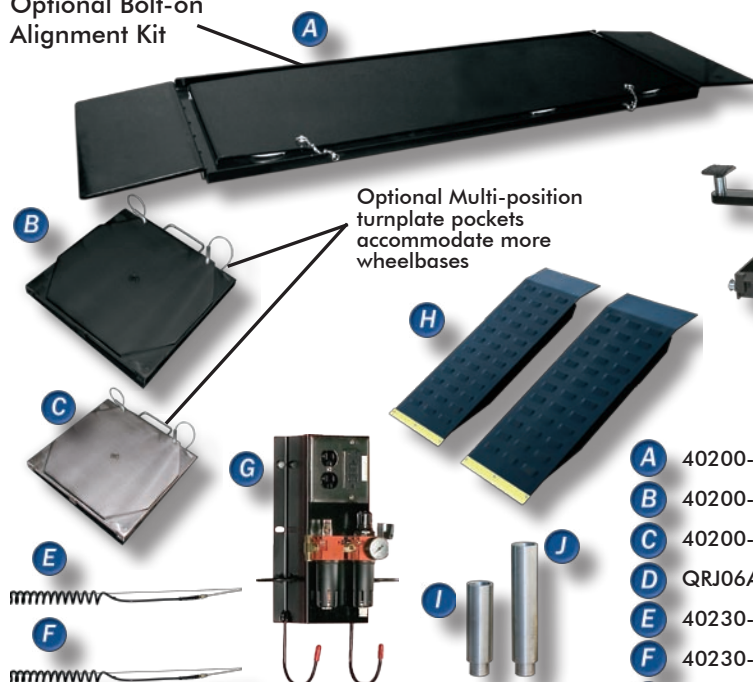

Standard adjustable runways for general service

Optional 6,000 lb. capacity Rolling Jacks

33" - 50 3/16"

3 3/8" - 13 1/4"  
Adjustable footpad height

- A** 40200-3DBK - Bolt-on alignment kit for Q4P12E/Q4P12X (shown with turnplates)
- B** 40200-3DBK - Black turnplate option (standard) on alignment kit
- C** 40200-3DSS - Stainless Steel turnplate option (upgrade)
- D** QRJ06A - 6,000 lb. capacity rolling jack for Q4P12E/Q4P12X
- E** 40230-E - Internal Airline Kit for Dual Rolling Jack operation for Q4P12E
- F** 40230-X - Internal Airline Kit for Dual Rolling Jack operation for Q4P12X
- G** B10264 - Air/electric workstation with filter/lubricator/regulator
- H** 10266-L - Optional Ramp kit - 48" long for drive through option and/or low profile vehicles (fits Q4P12E/Q4P12X)
- I** 10355-6 - 6" Adapter for QRJ06A
- J** 10355-9 - 6" Adapter for QRJ06A

For more information, contact your Authorized Quality Lifts Distributor:



QUALITY LIFTS  
200 Cabel Street  
Louisville, Kentucky 40206

Phone Toll-Free: 877-771-5438  
www.qualitylifts.com

Quality Lifts reserves the right to make changes to specifications without notice and without making changes retroactive. Unloading, installation and oil not included.

Lit#Q4P12\_03/12 ©2012, Quality Lifts, LLC