




**Automatic tyre  
changer with  
“Leva la Leva”  
system**



- Central wheel clamping
- Reduced footprint
- Working ergonomics

**Precision and technology at your service!  
Maximum efficiency, minimum effort!**

**Automatic tyre changer with “Leva la Leva” system and central wheel clamping** for cars, SUVs and light duty vehicles. Reduced footprint and working ergonomics are the other strengths that enhance this equipment.

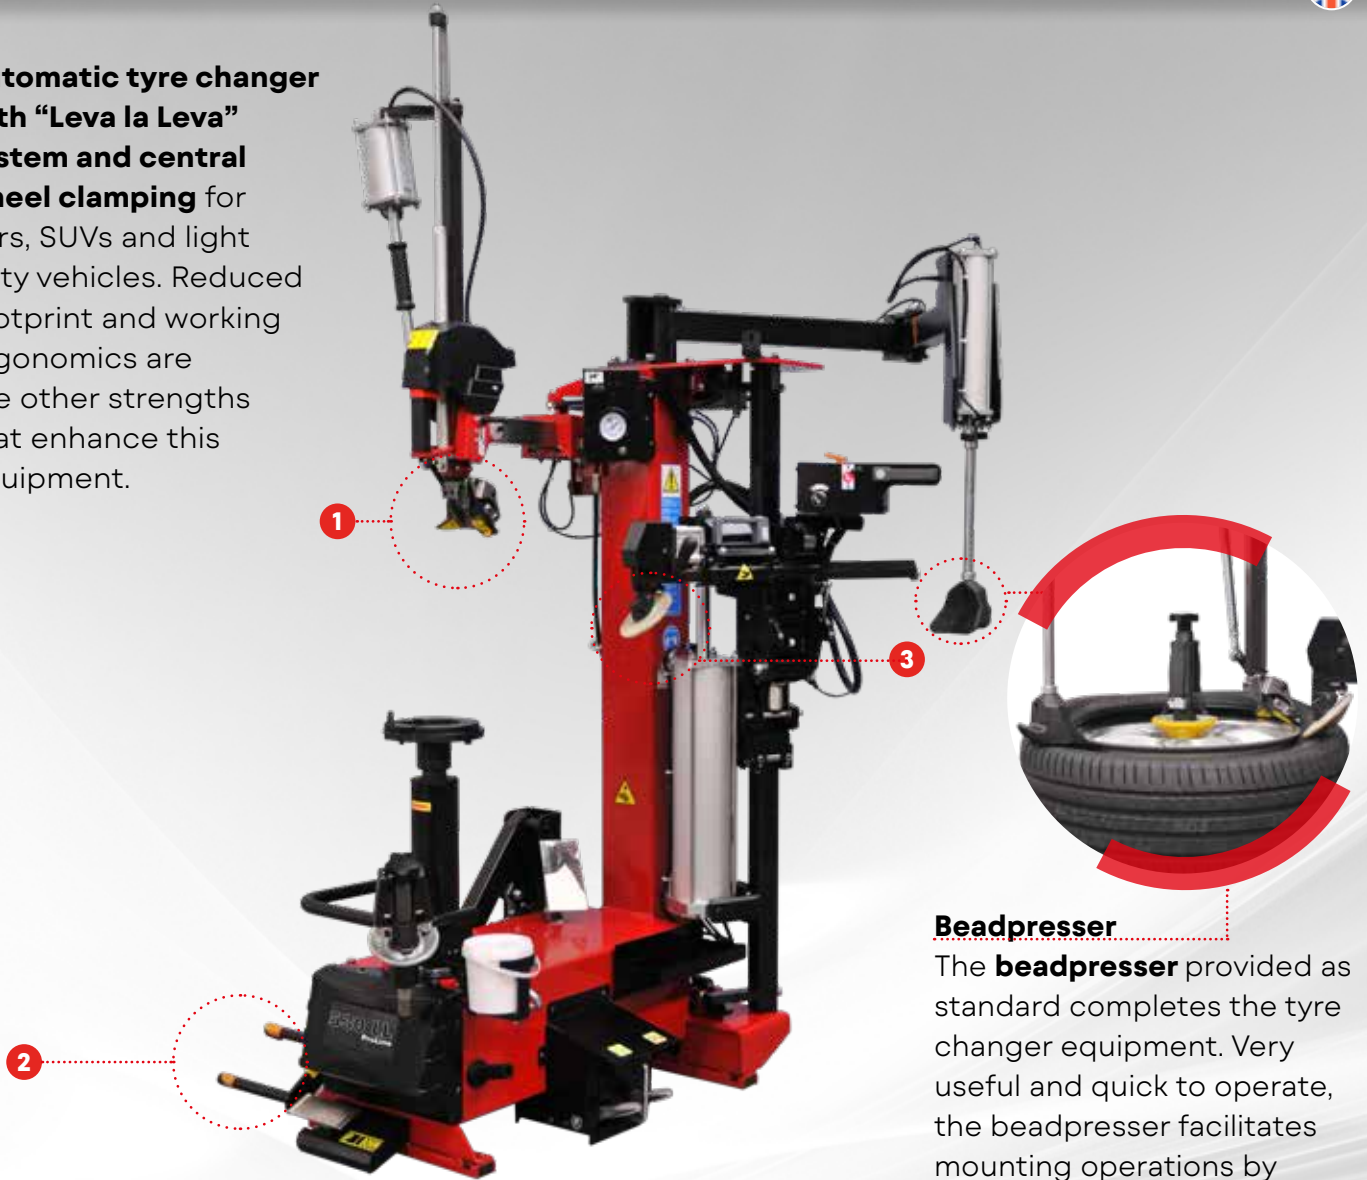

### **Beadpresser**

The **beadpresser** provided as standard completes the tyre changer equipment. Very useful and quick to operate, the beadpresser facilitates mounting operations by minimising stress on the tyre.

## **1\_LEVA LA LEVA SYSTEM**

The **Leva La Leva technology** is increasingly in demand, and **combined with central wheel clamping**, it allows to offer a **truly professional tyre change**. The movement is designed to follow the rim profile without damaging the TPMS sensors, to hook the bead and bring it outside so that it can be removed, all without the slightest effort and ensuring the best protection for rims and tyres.





## 2\_WHEEL LIFTER

The **wheel lifter** is really useful when working with **heavy** or **very large wheels**. Furthermore, its construction features and plastic guards allow to handle alloy rims without scratching them. Standard.



## 3\_DYNAMIC BEAD BREAKING

The peculiarity of this tyre changer is that it only features **one bead breaking arm**. Thanks to a **remarkable tilting system**, this arm makes it easy to move the bead breaker disc from top to bottom and vice versa without effort and without reducing the distance from the rim edge.

The bead breaking arm's equipment also includes the **drive that allows to change the bead breaker disc's inclination** so that the disc comes right up against the bead seat for **optimal dynamic bead breaking**.





## RECOMMENDED ACCESSORIES



**8-11900275**  
TI Inflation System



**C-A2-8100000**  
Flange for reverse rims



**C-97-8000003**  
Pick-up wheel cone for rims with  
max. hole Ø 185 mm



**C-A5-8300000**  
Spacer ring H=20 mm for wide  
wheels



**8-11120081**  
Kit of LL tool head guards

For further information, consult the complete accessories catalogue

## TECHNICAL DATA

|                           |                                                        |
|---------------------------|--------------------------------------------------------|
| Power supply              | 200/240V - 1Ph - 50/60Hz -<br>100/130V - 1Ph - 50/60Hz |
| Type of tyre used         | Conventional - Lowered<br>Run Flat - Balloon           |
| Rim diameter              | from 12 to 30"                                         |
| Maximum tyre diameter     | 1200 mm (47")                                          |
| Maximum tyre width        | 15"                                                    |
| Bead breaking force       | 7600 N                                                 |
| Operating pressure        | 8 - 10 bar                                             |
| Min. nominal air flowrate | 100NI/min                                              |
| Lifting capacity          | 85 kg                                                  |
| Weight                    | 371 kg                                                 |

## STANDARD EQUIPMENT



## OVERALL DIMENSIONS



The manufacturer reserves the right to modify the features of its products at any time.



NEXION SPA - [www.corghi.com](http://www.corghi.com) - [info@corghi.com](mailto:info@corghi.com)

Cod. DPCG001427\_07/2024

